


Removing License Statistics

The information on this page refers to License Statistics versions prior to v6.17, which introduced new Linux installers. If you are running a previous version of License Statistics, see [documentation for previous versions](#).

The procedure for removing License Statistics depends on your installation platform, as described below.

Removing License Statistics on Windows

1. Run the License Statistics installer and use the **Remove** option, or use the Control Panel.

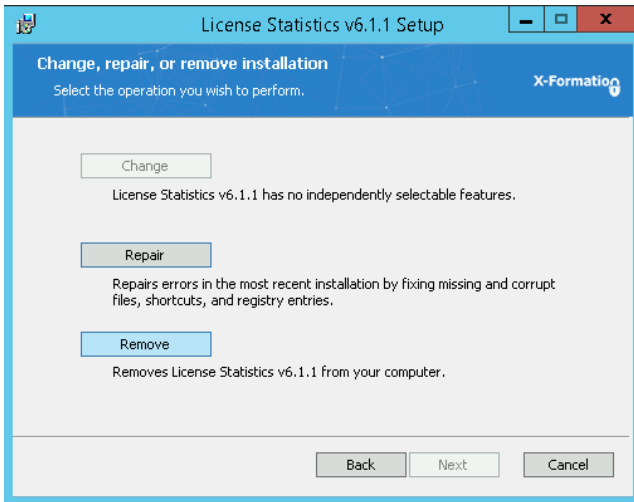

2. Remove the external database, if applicable.

Removing License Statistics on Linux (prior to License Statistics v6.17)

To remove License Statistics for Linux installations prior to License Statistics v6.17:

1. Stop the `xflicstat` service.
2. Remove the current installation folder.
3. Remove the external database, if applicable.

Removing License Statistics on Linux (v6.17 and newer)

For installations of License Statistics v6.17 and newer, see the page relevant to your platform:

- [Linux installation using DEB installer](#), for Debian and Ubuntu distributions
- [Linux installation using RPM installer](#), for RedHat Enterprises distributions
- [Generic Linux installation](#) for Linux distributions other than DEB or RPM, or for customized installation